





WESTAWAY

SAILS

CROSS CUT FULLY BATTENED MAINSAIL

AVAILABLE MATERIALS

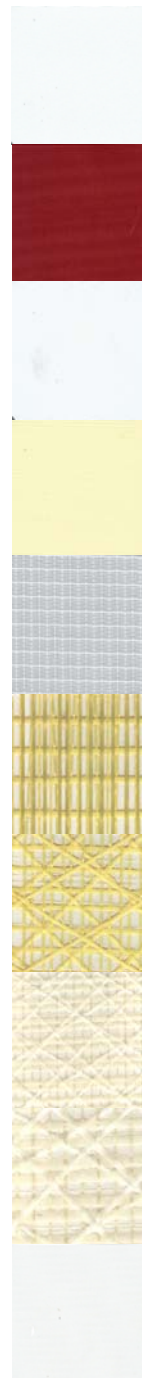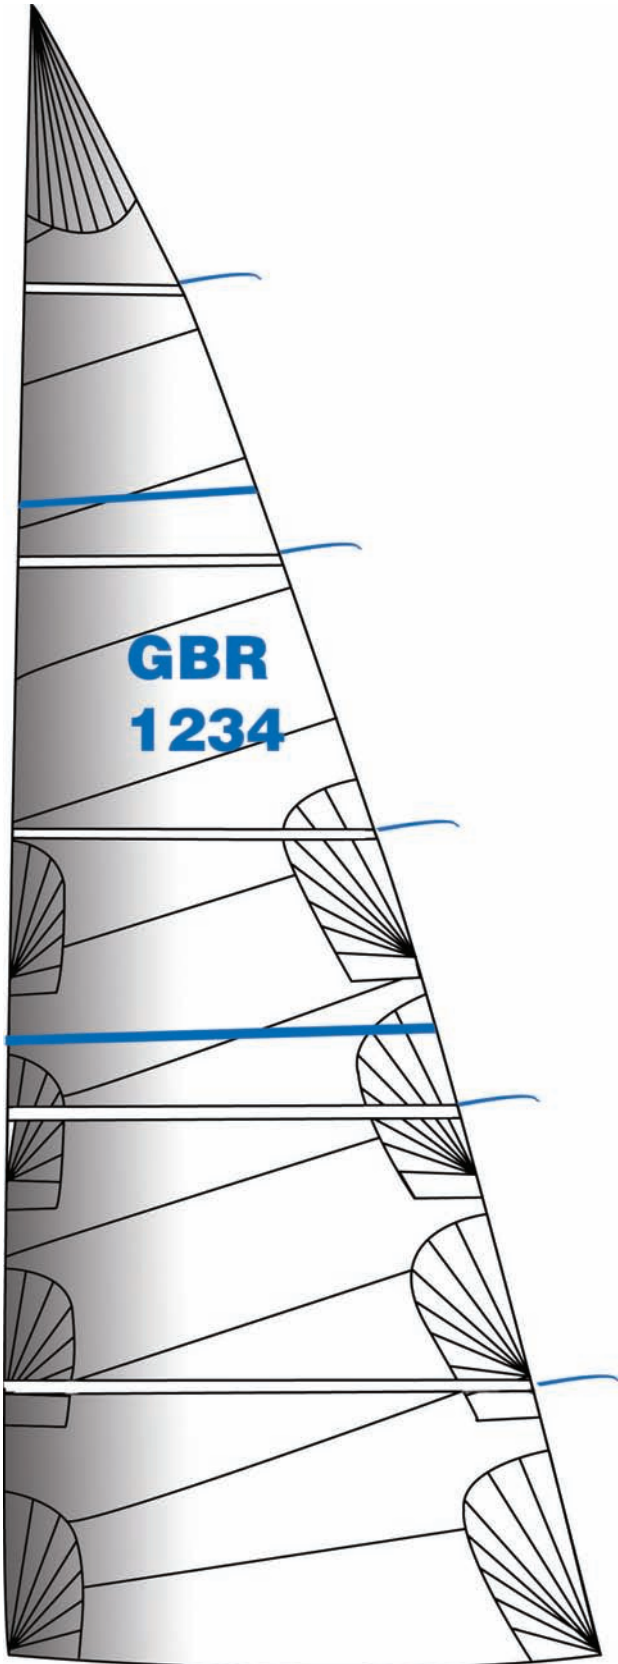

STANDARD CRUISE DACRON
Dimension TNF

STANDARD CRUISE DACRON
Challenge High Mod (White / Cream / Tan)

PREMIUM CRUISE DACRON
Dimension AP

PREMIUM COLOURED CRUISE DACRON
Dimension AP UV Cream

BLUE WATER CRUISE
Dimension Hydra Net

KEVLAR HIGH PERFORMANCE RACE
Dimension FLXA

KEVLAR OFFSHORE PERFORMANCE RACE
Dimension FLXA C/W single or double sided Polyester woven taffeta for added durability.

PENTEX CLUB RACE
Dimension FLXP

PENTEX OFFSHORE CLUB RACE
Dimension FLXP C/W single or double sided Polyester woven taffeta for added durability

HIGH ASPECT PREMIUM DACRON
Dimension SF / Contender High Aspect Dacron





WESTAWAY

SAILS

CROSS CUT FULLY BATTENED MAINSAIL



Anti-chafe webbing along BOTH sides of batten pockets.

Non-shattering & anti-twist Epoxy or Fibreglass battens.

Anti-chafe 3-step stitched seams.



Sailman adjustable 'batten tensioning' luff receptacle to suit pressure absorbing slide of your choice.

Luff reef 'spectacle' stainless steel rings & webbing luff handle to aid pulling sail down & reefing.

Leech line cleats at clew & reefs with option of overhead leech line allowing leech line to be adjusted at gooseneck.

Still the most common and suitable option for the majority of cruising or cruiser / racer boats. A cross cut sail is simple, durable and economic. Radial style woven fabric is simply not stable enough to make a long lasting radial sail, Westaway only recommend radial construction for laminate fabrics; any performance advantage a new radial Dacron sail will be soon offset by the sail shape 'ballooning' as it ages. Mainsails are usually high aspect as a result we use an all purpose or high aspect yet tightly woven Dacron. This ensures that the sail will be long lasting in both durability and shape retention. Fully battened Mainsails include Sailman anti twist and anti shatter battens, sail numbers, class insignia, tell tales, draft stripes, sail bag and optional number of reefs. The foot attachment can be via a bolt rope or loose however a shelf foot with bolt rope is optional. See our separate page for information on our quality luff slide options.

